




Operation and Service Guide: Showers

P.O. Box 309 • Menomonee Falls, WI 53052-0309
1.800.BRADLEY • 1.262.251.6000 • bradleycorp.com

Column Shower & Wall Saver Showerheads

Prior to April 2011 (Wall Saver® showerheads only)

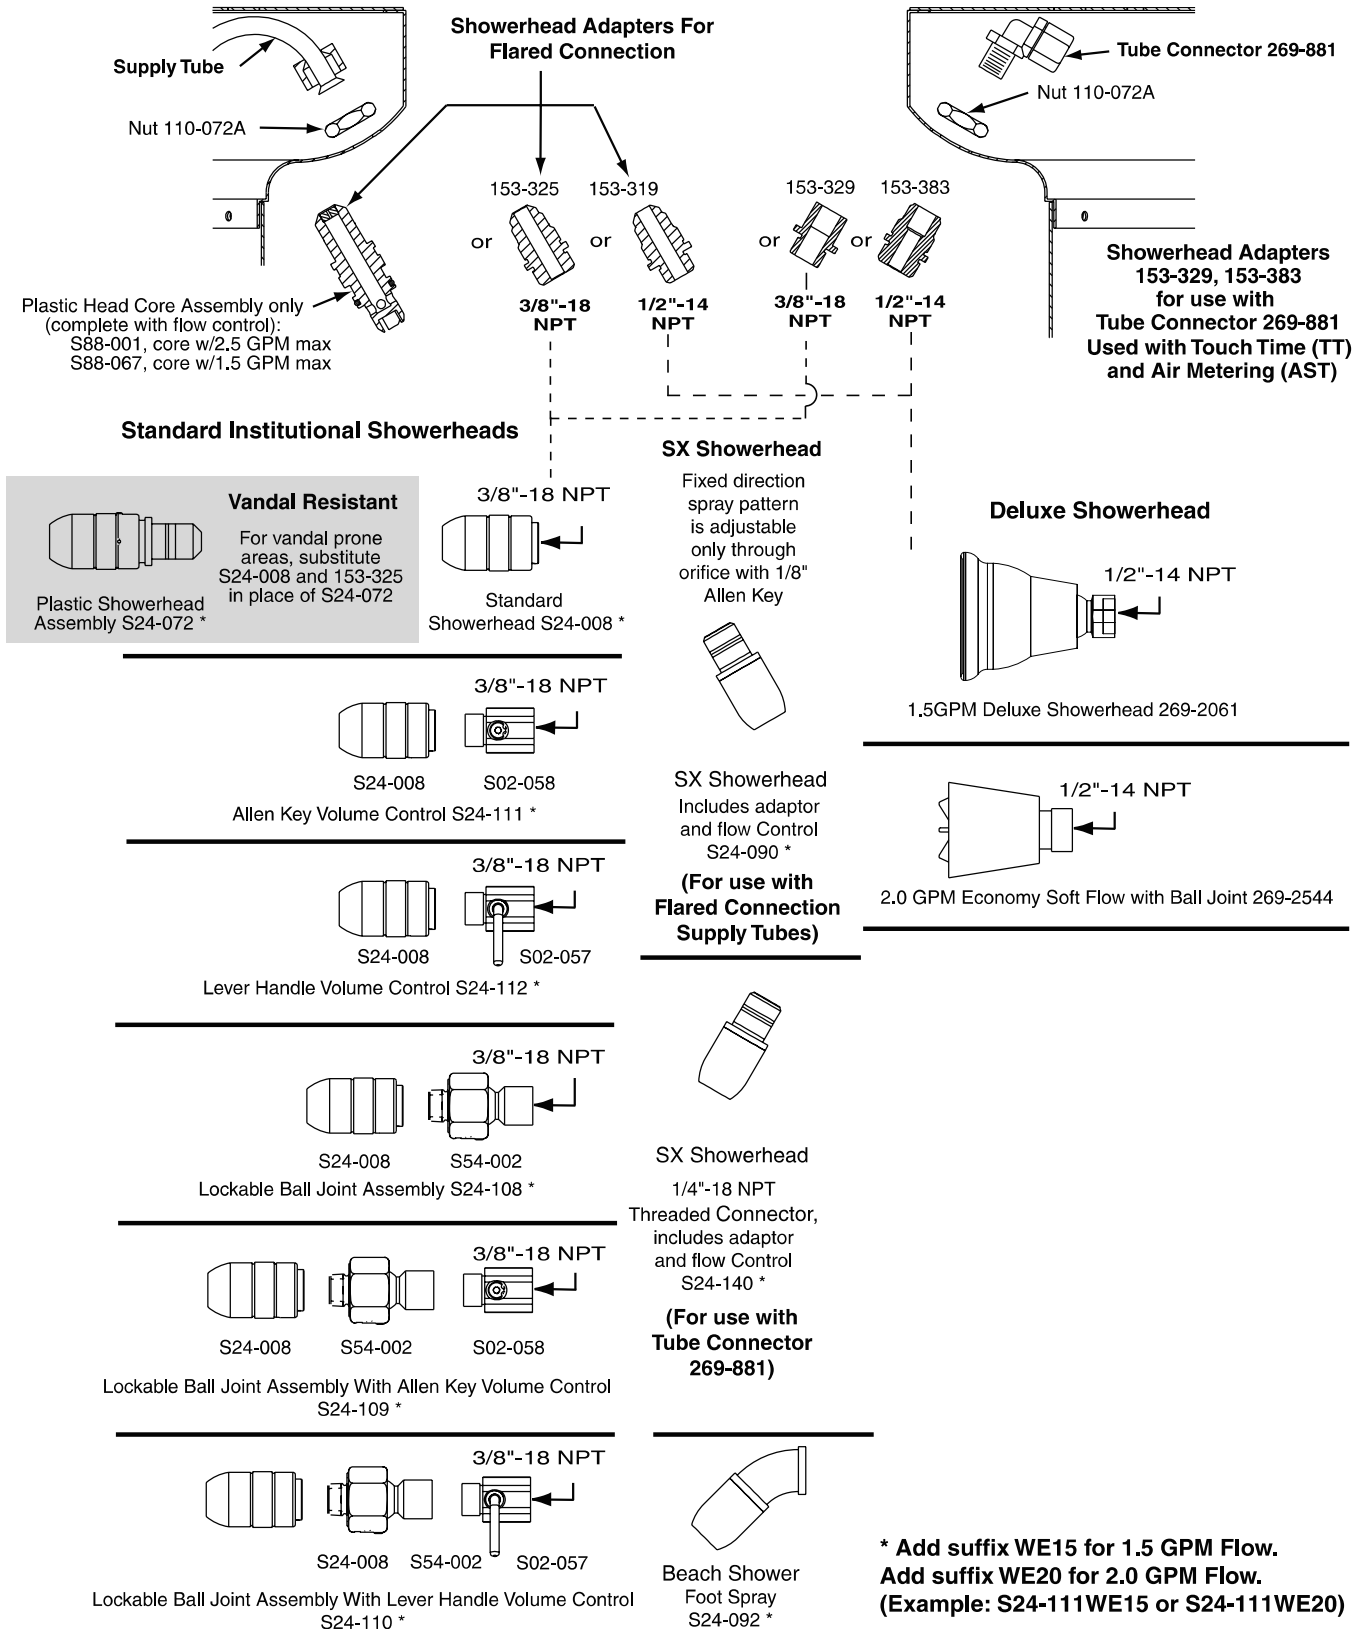

* Add suffix WE15 for 1.5 GPM Flow.
Add suffix WE20 for 2.0 GPM Flow.
(Example: S24-111WE15 or S24-111WE20)



Operation and Service Guide: Showers

P.O. Box 309 • Menomonee Falls, WI 53052-0309
1.800.BRADLEY • 1.262.251.6000 • bradleycorp.com

Shower head Type	Part No.	Max. Flow Rate @ 80 ±2 psi	Min. Flow Rate @ 45 ±2 psi Shower heads listed for use with automatic compensating valves rated at (see values below) or less
Standard Institutional (S)	S24-008*	2.5 gpm (9.5 L/min)	2 gpm (7.6 L/min)
	S24-008WE15	1.5 gpm (5.7 L/min)	1.4 gpm (5.3 L/min)
	S24-008WE20	2.0 gpm (7.6 L/min)	1.7 gpm (6.6 L/min)
Standard Institutional (S) (Plastic Showerhead Assembly)	S24-072*	2.5 gpm (9.5 L/min)	2 gpm (7.6 L/min)
	S24-072WE15	1.5 gpm (5.7 L/min)	1.4 gpm (5.3 L/min)
	S24-072WE20	2.0 gpm (7.6 L/min)	1.7 gpm (6.6 L/min)
Standard Institutional with Lockable Ball Joint (S-LBJ)	S24-108*	2.5 gpm (9.5 L/min)	2.1 gpm (8.3 L/min)
	S24-108WE15	1.5 gpm (5.7 L/min)	1.4 gpm (5.3 L/min)
	S24-108WE20	2.0 gpm (7.6 L/min)	1.7 gpm (6.6 L/min)
Standard Institutional with Lever Handle Volume Control (S-LHV)	S24-112*	2.5 gpm (9.5 L/min)	2.2 gpm (8.3 L/min)
	S24-112WE15	1.5 gpm (5.7 L/min)	1.4 gpm (5.3 L/min)
	S24-112WE20	2.0 gpm (7.6 L/min)	1.7 gpm (6.6 L/min)
Standard Institutional with Allen Key Volume Control (S-AKV)	S24-111*	2.5 gpm (9.5 L/min)	1.7 gpm (6.4 L/min)
	S24-111WE15	1.5 gpm (5.7 L/min)	1.3 gpm (4.9 L/min)
	S24-111WE20	2.0 gpm (7.6 L/min)	1.7 gpm (6.6 L/min)
Standard Institutional with Allen Key Volume Control and Lockable Ball Joint (S-AKV-LBJ)	S24-109*	2.5 gpm (9.5 L/min)	2.1 gpm (8.0 L/min)
	S24-109WE15	1.5 gpm (5.7 L/min)	1.3 gpm (4.9 L/min)
	S24-109WE20	2.0 gpm (7.6 L/min)	1.7 gpm (6.6 L/min)
Standard Institutional with Lever Handle Volume Control and Lockable Ball Joint (S-LHV-LBJ)	S24-110*	2.5 gpm (9.5 L/min)	2.2 gpm (8.3 L/min)
	S24-110WE15	1.5 gpm (5.7 L/min)	1.3 gpm (4.9 L/min)
	S24-110WE20	2.0 gpm (7.6 L/min)	1.7 gpm (6.6 L/min)
Deluxe (SF)	269-2061	1.5 gpm (5.7 L/min)	1.3 gpm (4.9 L/min)
Economy Soft Flow with Ball Joint (ES)	269-2544	2.0 gpm (7.6 L/min)	1.7 gpm (6.6 L/min)
Severe Service (SX) (Copper Flared Connection)	S24-090*	2.5 gpm (9.5 L/min)	2.4 gpm (9.1 L/min)
	S24-090WE15	1.5 gpm (5.7 L/min)	1.4 gpm (5.3 L/min)
	S24-090WE20	2.0 gpm (7.6 L/min)	1.7 gpm (6.6 L/min)
Severe Service (SX) (Plastic Tube Connection)	S24-140*	2.5 gpm (9.5 L/min)	2.4 gpm (9.1 L/min)
	S24-140WE15	1.5 gpm (5.7 L/min)	1.4 gpm (5.3 L/min)
	S24-140WE20	2.0 gpm (7.6 L/min)	1.7 gpm (6.6 L/min)
Beach Shower Foot Spray	S24-092*	2.5 gpm (9.5 L/min)	2.4 gpm (9.1 L/min)
	S24-092WE15	1.5 gpm (5.7 L/min)	1.4 gpm (5.3 L/min)
	S24-092WE20	2.0 gpm (7.6 L/min)	1.7 gpm (6.6 L/min)

* 2.5 GPM flow rate does not meet California Energy Commission 20 CCR T.20, Div. 2, 1601-1609.